


## ENERGIZER NO. L91

AA



Industry Standard Dimensions in mm (inches)

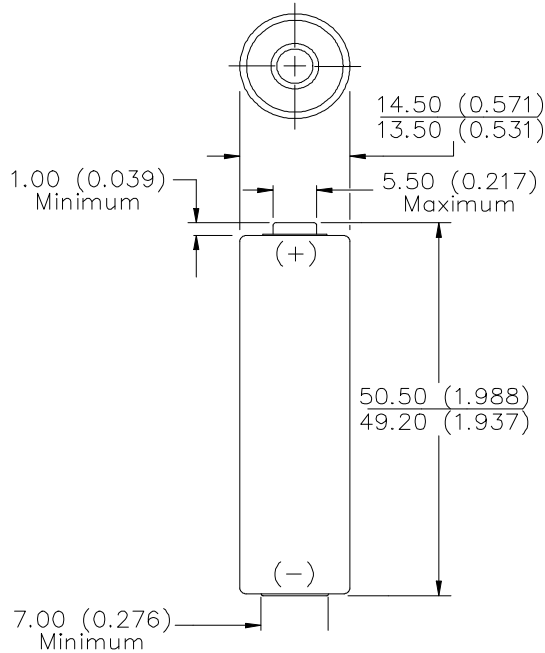

**Chemical System:** Lithium  
 Lithium/Iron Disulfide (Li/FeS<sub>2</sub>)

**Designation:** ANSI / NEDA 15LF

**Battery Voltage:** 1.5 Volts

**Average Weight:** 14.5 grams (0.5 oz.)

**Volume:** 8.0 cubic centimeters (0.5 cubic inch)

**Storage Temp:** -40°C to 60°C (-40°F to 140°F)

**Operating Temp:** -40°C to 60°C (-40°F to 140°F)

**Average Capacity:** 2900 mAh (to 1.0 volts)  
 (Rated capacity at 200 mA drain.)

**Max Discharge:** 2.0A Continuous


**Lithium Content:** Less than 1 gram (0.04 oz.) per cell

**Jacket:** Non-magnetic Plastic Label


**Transportation:** Meets requirements of 49CFR 173.185 (b) and IATA special provisions A45.

**Shelf Life:** 10 years (+)


CONSTANT CURRENT DISCHARGE  
 Typical Service

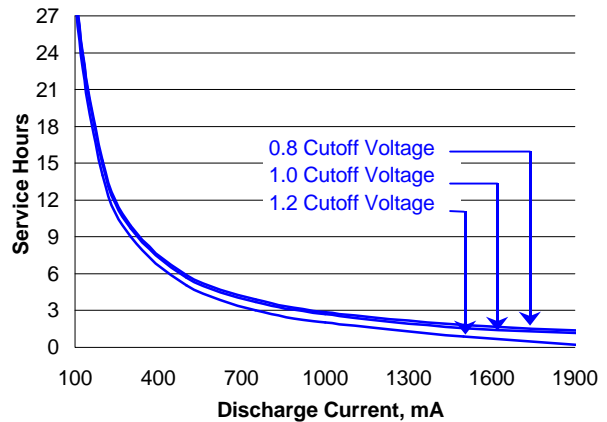

CONSTANT POWER DISCHARGE  
 Continuous @ 20°C to 0.9 volts

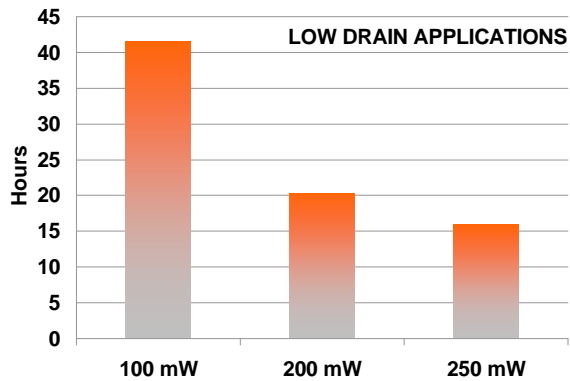

CONSTANT POWER DISCHARGE  
 Continuous @ 20°C to 1.0 volts

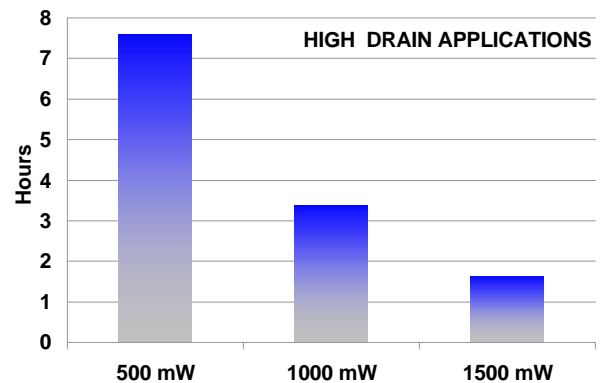

### Important Notice



This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.







Copyright © Eveready Battery Co. Inc. - All Rights Reserved

## ENERGIZER NO. L91

### Temperature Effects

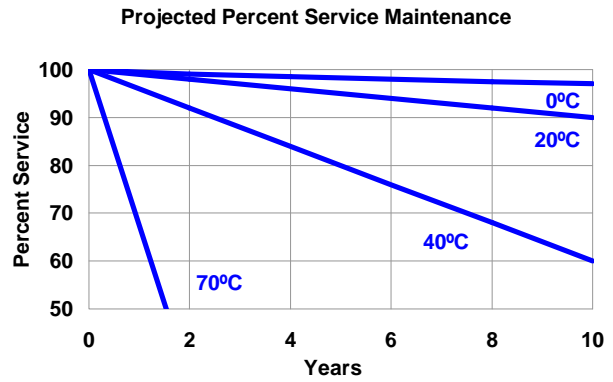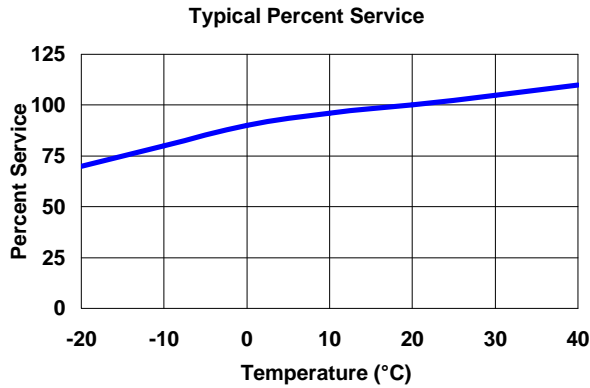

### ANSI - IEC Industry Standard Tests @ 20° C

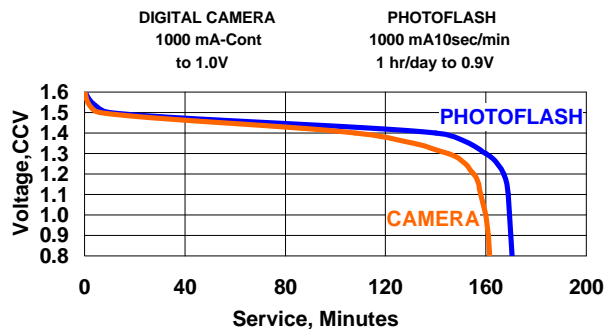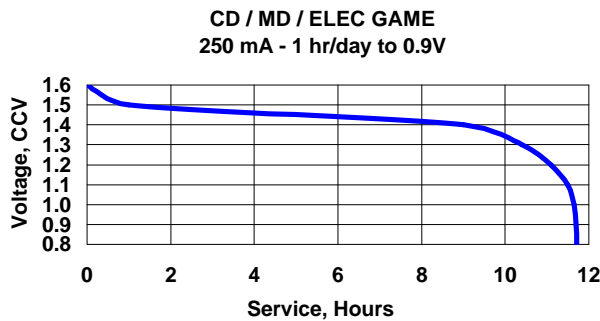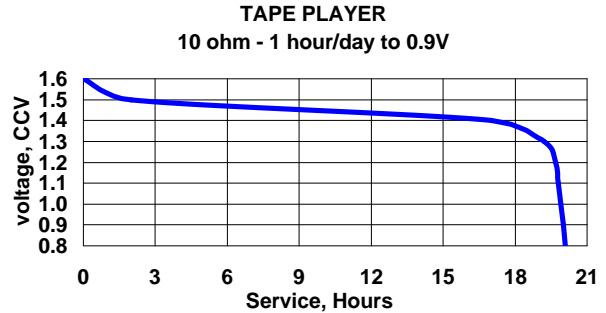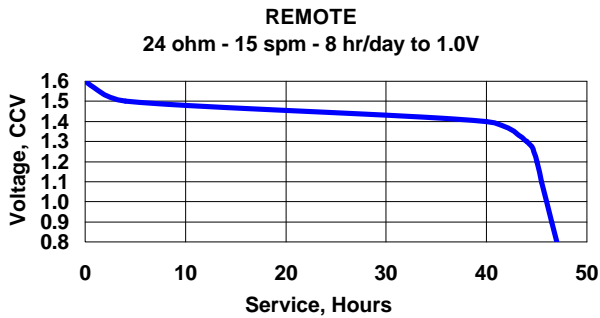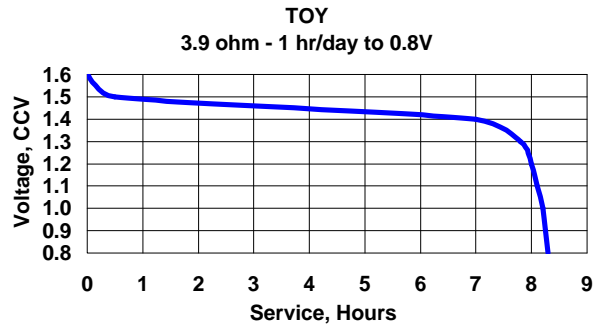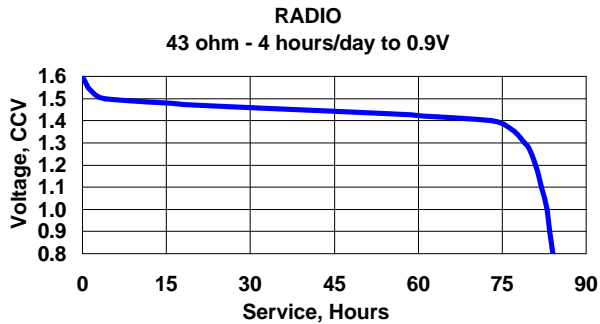

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved